

MP-24 HYDROPHONE



Industry Standard Hydrophone

- High output
- Minimal sensitivity change with depth
- Acceleration noise canceling configuration
- Easy method to check polarity

MP-24

A high-output, pressure sensitive detector for use in swamps, rivers, bays, and transition zones. Several different natural frequencies and sensitivities are available for easy combination with geophone sensors.

The MP-24 is transformer-coupled and has four piezoelectric crystals connected in an acceleration-cancelling arrangement with each crystal operating in the high-sensitivity bender mode. The crystals and transformer are permanently molded in a durable polyurethane case. This sealed unit has a thermoplastic resin outer case with easy access ports for polarity testing.

DIMENSIONS

Length	13.26 cm (5.22 in.)
Diameter	5.72 cm (2.25 in.)
Weight	369 g (0.8 lbs.)

PHYSICAL SPECIFICATIONS

MP-24 L3

Operational Depth	0.3–76.2 m (1–250 ft.)
Operating Temperature	0–35° C (32–95° F)


ELECTRICAL SPECIFICATIONS

@25°C

Natural Frequency	10 Hz *
Voltage Sensitivity	7.5 Volts/bar
Impedance, typical at 250 Hz	250 Ω
DC Resistance	160 Ω

* Other frequencies available.

All rights reserved. Specifications subject to change at sole discretion of Geospace Technologies.

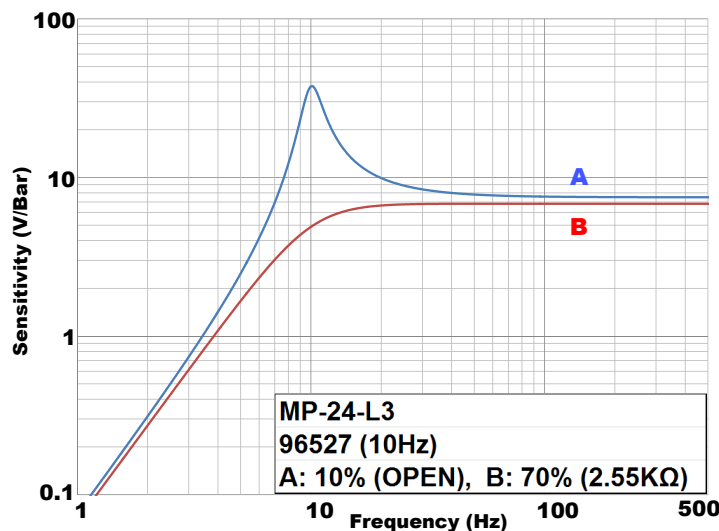

7007 Pinemont Drive • Houston, Texas 77040 USA

www.geospace.com

Tel: 713-986-4444 • Fax: 713-986-4445



Geospace Technologies, Canada
2735 - 37th Avenue N.E.
Calgary, Alberta,
T1Y 5R8 Canada
403 250-9600

Geospace Technologies, China
Room 700, 7th Floor
Lido Office Tower, Lido Place
Jichang Road, Jiang Tai Road
Beijing, 100004, P.R.China
011 (86) 10 6437 8768

Geospace Technologies
Sucursal Sudamericana
Carrera 127-22 G 28 Int. 30
Agrupación Industrial La Esperanza
Bogotá, Colombia
011-57-1-742-7414

Geospace Technologies, Eurasia
Kirovogradskaya, 36
Ufa, Baskortostan
Russia 450001
011 (7) 3472 25 39 73

Geospace UK
F3 Bramingham Business Park,
Enterprise Way, Luton
Bedfordshire LU3 4BU, England
011 44 (0) 7775 688 467